

OTICON | Real

Product comparison

	Oticon Real 1	Oticon Real 2	Oticon Real 3
Speech Understanding			
MoreSound Intelligence™ 2.0	Level 1	Level 2	Level 3
-Environment configuration	5 Options	5 Options	3 Options
-Virtual Outer Ear	3 Configurations	1 Configuration	1 Configuration
-Spatial Balancer	100%	60%	60%
-Neural Noise Suppression, Difficult / Easy	10 dB / 4 dB	6 dB / 2 dB	6 dB / 0 dB
-Sound Enhancer	3 Configurations	2 Configurations	1 Configuration
-Wind & Handling Stabilizer	•	•	•
MoreSound Amplifier™ 2.0	•	•	•
-SuddenSound Stabilizer	6 Configurations	5 Configurations	4 Configurations
Feedback Prevention	MoreSound Optimizer™ & Feedback shield	MoreSound Optimizer™ & Feedback shield	MoreSound Optimizer™ & Feedback shield
Spatial Sound™	4 Estimators	2 Estimators	2 Estimators
Soft Speech Booster	•	•	•
Frequency lowering	Speech Rescue™	Speech Rescue™	Speech Rescue™
Sound Quality			
Clear Dynamics	•	•	-
Better-Ear Priority	•	•	-
Fitting Bandwidth*	10 kHz	8 kHz	8 kHz
Bass Boost (streaming)	•	•	•
Processing Channels	64	48	48
Personalisation & Optimising Fitting			
Fitting Bands	24	20	18
Multiple Directionality options	•	•	•
Adaptation Manager	•	•	•
Fitting Formulas	VAC+, NAL-NL1/NAL-NL2, DSL v5	VAC+, NAL-NL1/NAL-NL2, DSL v5	VAC+, NAL-NL1/NAL-NL2, DSL v5
Connecting to the World			
Oticon Companion app	•	•	•
Hands-free communication**	•	•	•
Direct streaming***	•	•	•
ConnectClip	•	•	•
EduMic	•	•	•
Remote Control 3.0	•	•	•
TV Adapter 3.0	•	•	•
Phone Adapter 2.0	•	•	•
Additional			
Tinnitus SoundSupport™	•	•	•
CROS/BiCROS support	•	•	•



* Bandwidth accessible for gain adjustments during fitting

** Hands-free communication is available with iPhone 11 or later running iOS 15.2 or later, and iPad running iPadOS 15.2 or later

*** From iPhone, iPad, iPod touch, and selected Android™ devices with the Audio Streaming for Hearing Aids (ASHA) protocol

Oticon Real™

miniRITE R, miniRITE T, miniBTE R, and miniBTE T

Oticon Real comes with MoreSound Intelligence 2.0 and MoreSound Amplifier 2.0 powered by the Polaris R™ platform. The upgraded features optimally manage wind and handling noise as well as both soft and loud sudden sounds. The improvements ensure access to a complete and balanced sound scene including environmental sounds, that are not distracting for the brain. All Oticon Real hearing aids are Made for iPhone hearing aids and support hands-free communication. They are also compatible with the Android™ Audio Streaming for Hearing Aids (ASHA) protocol - enabling streaming directly from iPhone, iPad, iPod touch and selected Android devices.

Oticon Real miniRITE R - offers a discreet design powered by a rechargeable lithium-ion battery. The style features telecoil and a double push-button.

Oticon Real miniRITE T - offers a discreet design with LED-light to make handling easy. The style features telecoil and a double push-button. It comes with a disposable zinc-air battery.

Oticon Real miniBTE R - is a rechargeable BTE-style. It is powered by a rechargeable lithium-ion battery. The style features telecoil and a single push-button.

Oticon Real miniBTE T - is small in size and fits most ears. It comes with an LED-light for easy handling. The style features telecoil and a single push-button. It is powered by a disposable zinc-air battery.



Apple, the Apple logo, iPhone, iPad, and iPod touch are trademarks of Apple Inc., registered in the U.S. and other countries.

For information on compatibility, please visit www.oticon.co.uk/compatibility


© VarioTherm is a registered trademark of Dreve

www.oticon.co.uk




miniFit receiver options:

Select between receivers with four different output performances.

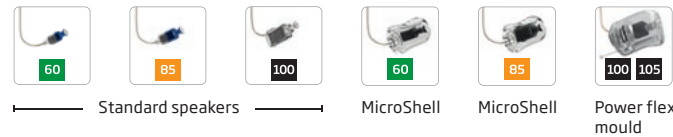


miniFit earpieces:

miniFit earpieces include standard domes and custom moulds. LiteTip and Micro mould are available in acrylic, soft silicone, or VarioTherm® material.

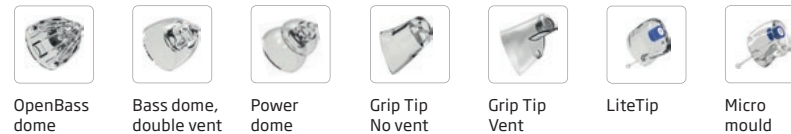

Fitting ranges - miniRITE

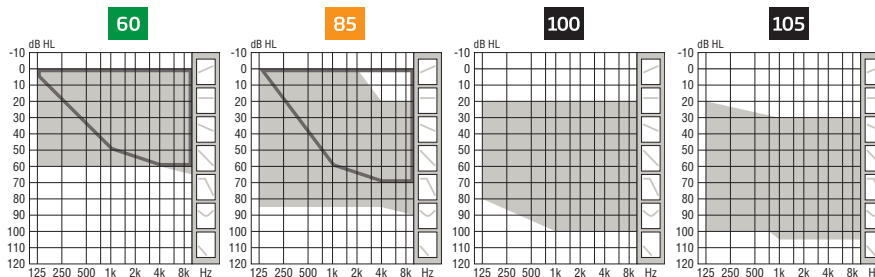

Mould, Bass & Power dome Power flex mould, Bass & Power dome Power flex mould
 OpenBass dome



*Only available for miniRITE R


Hook and thin tube for miniBTE:

Select between miniBTE hook with one of our custom moulds or Corda miniFit thin tubes with one of our miniFit earpieces.



miniBTE hook Corda miniFit thin tubes (0.9 mm and 1.3 mm)

Fitting ranges - miniBTE



Hook Corda miniFit (thin tube)

oticon
life-changing technology